

Fig. 1A

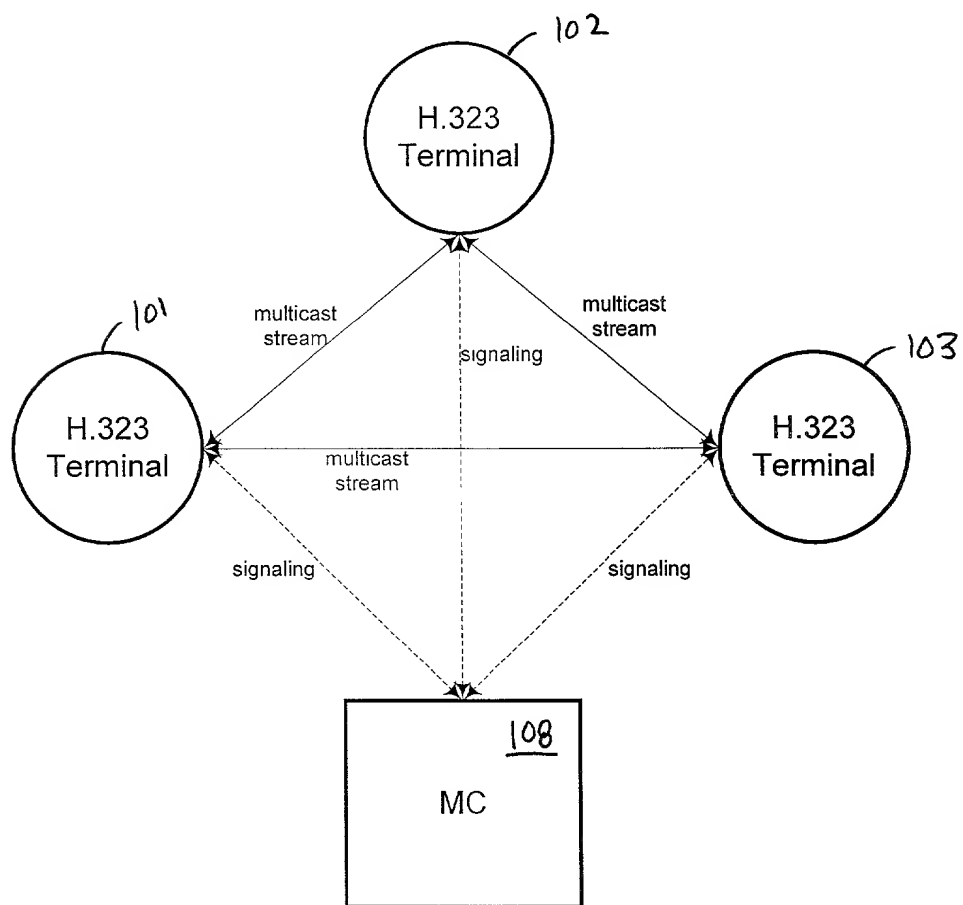


Fig. 1B

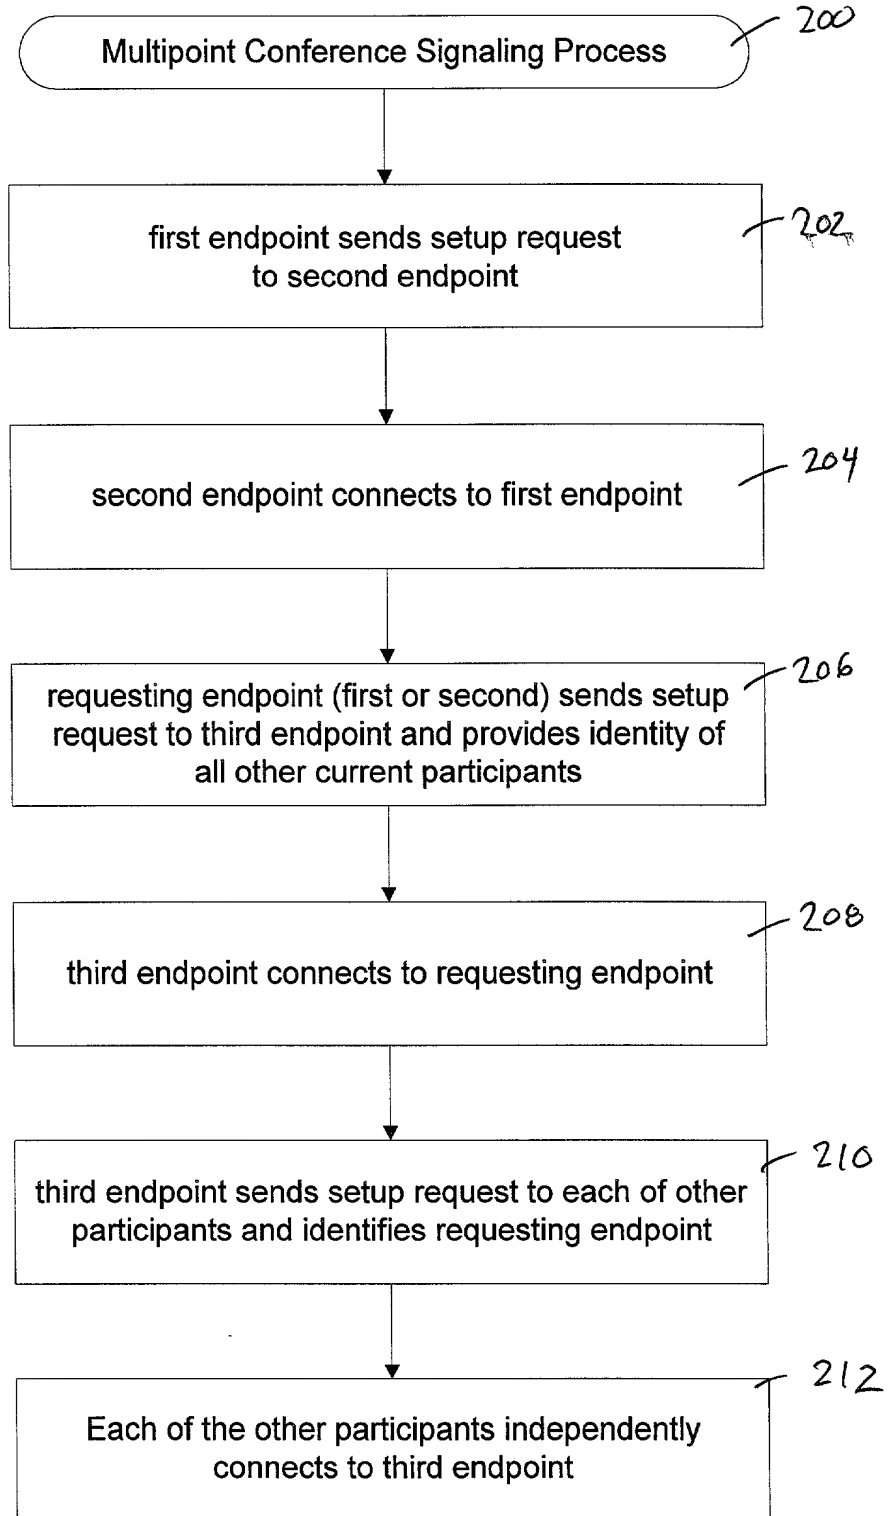


Fig. 2

```

h323-message-body CHOICE
{
  setup
  callProceeding
  connect
  alerting
  information
  releaseComplete
  facility
  progress
  empty
  Setup-UUIE,
  CallProceeding-UUIE,
  Connect-UUIE,
  Alerting-UUIE,
  Information-UUIE,
  ReleaseComplete-UUIE,
  Facility-UUIE,
  Progress-UUIE,
  NULL
  --used when a FACILITY message is sent,
  --but the Facility-UUIE is not to be invoked
  --(possible when transporting supplementary
  -- services messages)
}

```

},	nonStandardData	nonStandardParameter OPTIONAL,	--each sequence of octet string is defined as one
...	h4501SupplementaryService	SEQUENCE OF OCTET STRING OPTIONAL	--h4501SupplementaryService APDU as defined
	h245Tunneling	BOOLEAN,	--in Table 3/H.450.1
	h245Control	SEQUENCE OF OCTET STRING OPTIONAL,	--if TRUE, tunneling of H.245 messages is enabled
	nonStandardcontrol	SEQUENCE OF NonStandardParameter OPTIONAL	--each octet string may contain exactly one H.245 PDU

NonStandardParameter ::= SEQUENCE {
 300 310 nonStandardIdentifier
 312 data
 }

```

314 NonStandardIdentifier ::= CHOICE
    {
315     Object h221NonStandard
316     ...
317 }

```

```
320 {OCTET STRING}
322 AliasAddress::=CHOICE
```

e164	IA5String (SIZE(1..128))(FROM ("0123456789No.*")),
h323-ID	BMPString (SIZE(1..256)),
url-ID	--URL style address
transportID	IA5String (SIZE(1..512)),
email-ID	TransportAddress
partyNumber	IA5String (SIZE(1..512)),
	--rfc822-complaint email address

```

{ SetupDistributedMPNNonStandardParamter ::= CHOICE
{
  328 {
    Also ::= SEQUENCE
    {
      terminalAlias SEQUENCE OF AliasA
      ...
    }
  }
  330 {
    RequestedBy ::= SEQUENCE
    {
      terminalAlias SEQUENCE OF AliasA
      ...
    }
  }
}

```

Fig. 3A

Fig. 3B

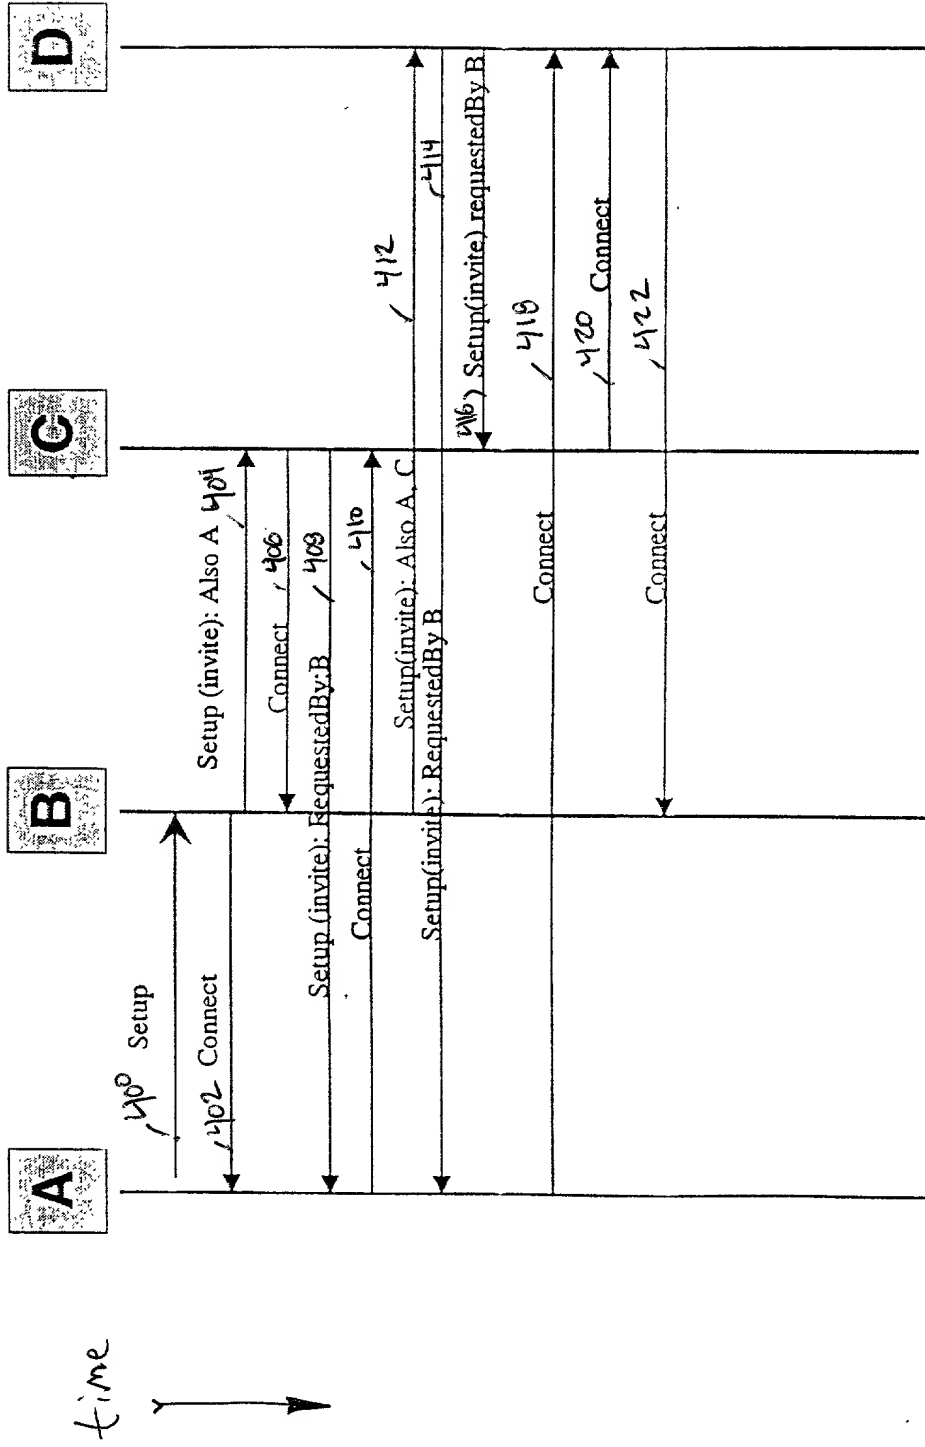


Fig. 4